

AF - A-Frame Boxes - Aluminum & Steel - Single Top Open Lid

A-frame boxes are heavy duty, high capacity and offer easy access to your equipment. Boxes can be mounted on A-frame trailer or many other applications. These boxes are perfect for storing your equipment, tools and personal gear. A-frame boxes are available in different sizes, and can be ordered custom size. All AMERICAN TRUCKBOXES boxes are designed and built to keep your equipment safe and secure.


Description

- An engineered aluminum or steel construction
- Fully seam welded on all seams and corners
- Stainless steel continuous hinge on full length of lid
- Recessed hinge system for flush mounting
- Channel braced reinforced lid
- Gas springs to “pop” and keep lid open
- Zinc epoxy primer with MR powder baked topcoat finish
- Lockable stainless steel adjustable latch
- Rain gutter and automotive type weather seal
- Automotive style latch with smooth rotary action
- Mounting kit included – M3300F

Diamond Tread



Steel

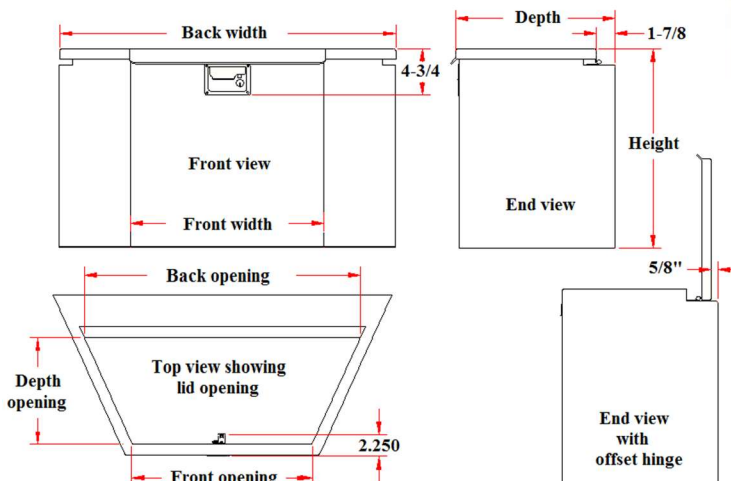

Note: Powder Coated Color Finish - Add or Coded at end of part number: BX = Black and WX = White (WX).

No.	Model Number	Material	Height (in.)	Depth (in.)	Rear Width (in.)	Front Width (in.)	Lid Back Opening Width (in.)	Lid Front Opening Width (in.)	Weight (lb.)
1.	A-AF31-081635-TT	.063 TP	8	16	35	20	20-1/2	18-5/8	17
2.	A-AF31-141430-TT	.063 TP	14	14	30	15	15-1/2	13-5/8	17
3.	A-AF31-141635-TT	.063 TP	14	16	35	20	20-1/2	18-5/8	21
4.	A-AF31-201635-TT	.063 TP	20	16	35	20	20-1/2	18-5/8	23
5.	A-AF41-141430-TT	.100 TP	14	14	30	15	15-1/2	13-5/8	24
6.	A-AF41-141635-TT	.100 TP	14	16	35	20	20-1/2	18-5/8	30
7.	A-AF41-201635-TT	.100 TP	20	16	35	20	20-1/2	18-5/8	36
8.	A-AF41-241643-TT	.100 TP	24	16	43	28	20-1/2	26-5/8	42

Steel Boxes:

9.	S-AF41-141430-BX	14 Gauge Steel	14	14	30	15	15-1/2	13-5/8	52
10.	S-AF41-141635-BX	14 Gauge Steel	14	16	35	20	20-1/2	18-5/8	64
11.	S-AF41-201635-BX	14 Gauge Steel	20	16	35	20	20-1/2	18-5/8	75
12.	S-AF41-241635-BX	14 Gauge Steel	24	16	35	20	20-1/2	18-5/8	84
13.	S-AF41-241643-BX	14 Gauge Steel	24	16	43	28	20-1/2	26-5/8	105