

FG - Door Frame Kits (External) - Aluminum & Steel - Drop or Bottom Open Door

Frame kits are heavy duty and offer a great way to access service areas and where an access door is needed. Frame kits can be mounted on any flat service or many other applications. Frame kits are available in different sizes, and can be ordered custom size. All AMERICAN TRUCKBOXES frame kits are designed and built to keep your equipment safe and secure.

Description

- An engineered aluminum or steel construction
- Fully seam welded on all seams and corners
- Stainless steel continuous hinge full length of door
- Lockable stainless-steel T-Handle Lock - Adjustable lock striker
- Easy bolts to any flat surface
- Zinc epoxy primer with MR powder baked topcoat finish
- Fully concealed rain gutter and automotive type weather seal
- Optional gas spring on top hinged and side open boxes
- Mounting bolts & nuts included




Drop Open



Side Open

Note: Door frame kits less than 38 inches width come standard with one lock only, unless otherwise specified.

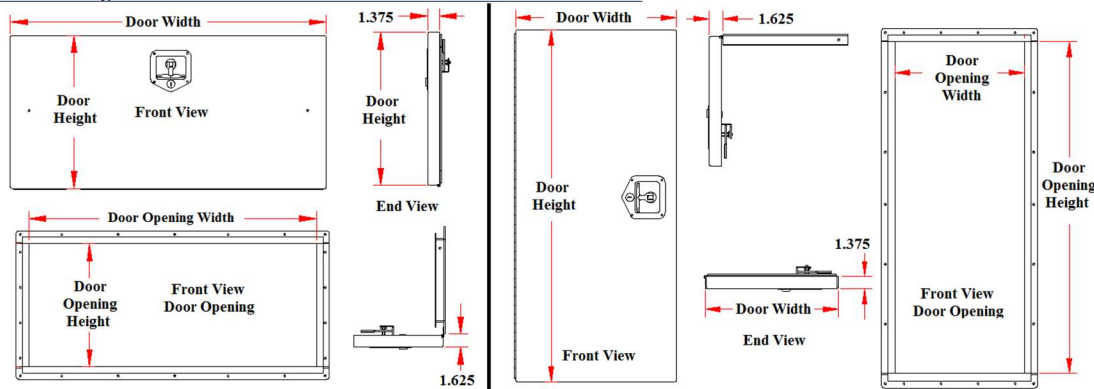

No.	Model Number	Material	Height (in.)	Width (in.)	Door Opening Height (in.)	Door Opening Width (in.)	Cut Mount Height (in.)	Cut Mount Width (in.)	Weight (lbs)
1.	A-FG5-2020D-S	.125 Smooth	20	20	17	17	18.5	18.5	9
2.	A-FG5-2024D-S	.125 Smooth	20	24	17	21	18.5	22.5	11
3.	A-FG5-2030D-S	.125 Smooth	20	30	17	27	18.5	28.5	12
4.	A-FG5-2436D-S	.125 Smooth	24	36	21	33	22.5	34.5	16
5.	A-FG5-2448D-S	.125 Smooth	24	48	21	45	22.5	46.5	21
6.	S-FG4-2020D-BX	14g. Steel	20	20	17	17	18.5	18.5	18
7.	S-FG4-2024D-BX	14g. Steel	20	24	17	21	18.5	22.5	21
8.	S-FG4-2030D-BX	14g. Steel	20	30	17	27	18.5	28.5	25
9.	S-FG4-2436D-BX	14g. Steel	24	36	21	33	22.5	34.5	33
10.	S-FG4-2448D-BX	14g. Steel	24	48	21	45	22.5	46.5	42
Note: Powder Coated Color Finish - Add or Coded at end of part number: BX = Black and WX = White (WX).									
11.	A-FG5-2020L-S	.125 Smooth	20	20	17	17	18.5	18.5	9
12.	A-FG5-2420L-S	.125 Smooth	24	20	21	17	18.5	18.5	11
13.	A-FG5-3020L-S	.125 Smooth	30	20	27	17	18.5	18.5	12
14.	A-FG5-3624L-S	.125 Smooth	36	24	33	21	34.5	22.5	16
15.	A-FG5-4824L-S	.125 Smooth	48	24	45	21	46.5	22.5	21
16.	S-FG4-2020L-BX	14g. Steel	20	20	17	17	18.5	18.5	18
17.	S-FG4-2420L-BX	14g. Steel	24	20	21	17	22.5	18.5	21
18.	S-FG4-3020L-BX	14g. Steel	30	20	27	17	28.5	18.5	25
19.	S-FG4-3624L-BX	14g. Steel	36	24	33	21	34.5	22.5	33
20.	S-FG4-4824L-BX	14g. Steel	48	24	45	21	46.5	22.5	42