


SF – Step Frame Boxes - Aluminum Single Drop & Bottom Open Door

Step frame boxes are super heavy duty, medium capacity and offer easy access from side of truck. Boxes can be mounted to truck frame with L-channel bolt-on mount brackets. These boxes are perfect for storing your equipment, like chains, binder, straps, tarps or your personal gear or tools. Truck boxes are available in different sizes and can be ordered custom size. All AMERICAN TRUCKBOXES boxes are designed and built to keep your equipment safe and secure.

Description

- An engineered aluminum construction
- Fully seam welded on all seams and corners
- Stainless steel continuous hinge on full length of door
- Fully concealed rain gutter with automotive weather seal
- Lockable SS Dolphin Tail HD adjustable T-handle latch
- Corners are gusseted for added strength and durability
- Strut grip steps (S) or no steps
- Aircraft-type nylon coated door cable
- Mounting kit not included: (Kits Av. = M3050C (add 20lbs. to weight))

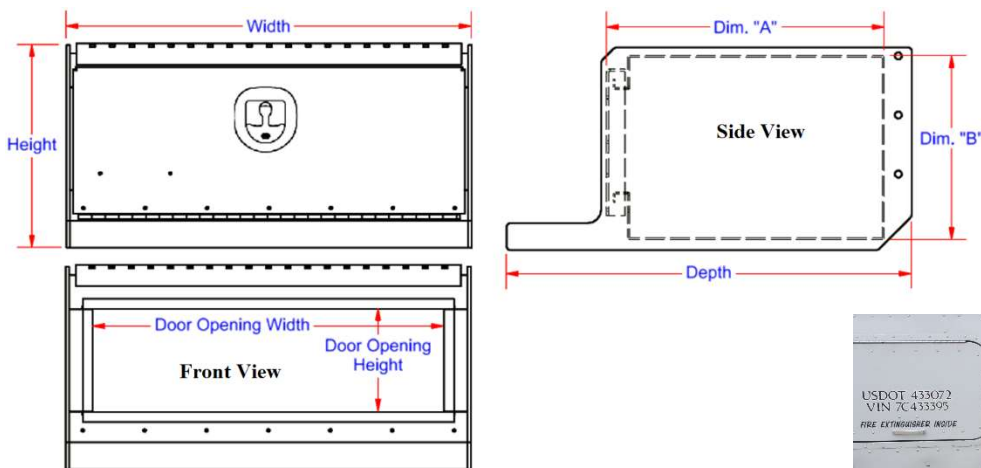

Mirror Finish



Note: Box door is available in: Standard = Smooth (S) or for Diamond Tread (T) and Mirror (M) - changer end of part number.

No.	Model Number	Material	Height (in.)	Depth (in.)	Width (in.)	Door Opening Height (in.)	Door Opening Width (in.)	Dim "A" (in)	Dim "B" (in)	Weight (lb.)
1.	A-SF51-152324D-S	.125 Smooth	15	23	24	7.0	18.0	18-3/4	13-5/8	42
2.	A-SF51-152330D-S	.125 Smooth	15	23	30	7.0	24.0	18-3/4	13-5/8	51
3.	A-SF51-212330D-S	.125 Smooth	21	23	30	13.0	24.0	18-3/4	19-5/8	56
4.	A-SF51S-153024D-S	.125 Smooth	15	30	24	7.0	18.0	18-3/4	13-5/8	69
5.	A-SF51S-153030D-S	.125 Smooth	15	30	30	7.0	24.0	18-3/4	13-5/8	75
6.	A-SF51S-213030D-S	.125 Smooth	21	30	30	13.0	24.0	18-3/4	19-5/8	90
7.	A-SF51S-273034D-S	.125 Smooth	27	30	34	19.0	28.0	18-3/4	25-5/8	110
8.	A-SF51S-153024T-S	.125 Smooth	15	30	24	10.0	18.0	18-3/4	13-5/8	69
9.	A-SF51S-153030T-S	.125 Smooth	15	30	30	10.0	24.0	18-3/4	13-5/8	75
10.	A-SF51S-213030T-S	.125 Smooth	21	30	30	16.0	24.0	18-3/4	19-5/8	90
11.	A-SF51S-273034T-S	.125 Smooth	27	30	34	22.0	28.0	18-3/4	25-5/8	116