
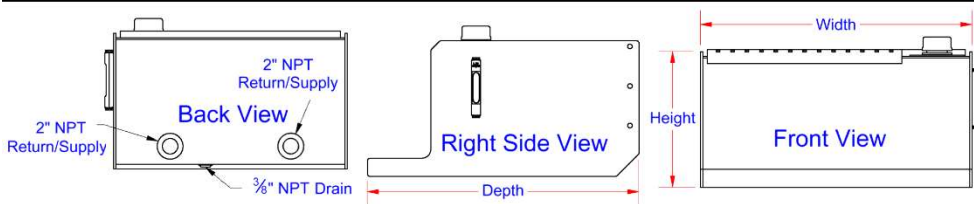


SO - Step Oil Reservoir Tanks - Aluminum

Step oil reservoir tanks are super heavy duty and offer easy access to truck from side of the truck. Steps tanks are available with or without steps. Step tanks are available in different sizes, ranging from 12" to 30" or can be ordered in custom widths. All AMERICAN TRUCKBOXES boxes are designed and built to keep your equipment safe and secure.

Description

- An engineered aluminum construction
- Fully seam welded on all seams and corners
- Replaceable top and bottom steps and mounts
- Laser cut strut grip steps or no steps
- Built-in baffles on larger tanks to reduce sloshing
- Filler Cap, Side Drain Hole & Oil Gauge
- Mounting kit not included: (Kits Av. = M3050C (add 20lbs. to weight))

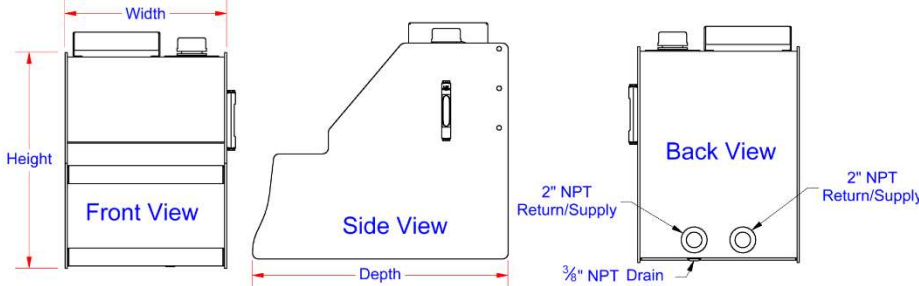

A-SO51 *(R) Right
Back Passenger Side



A-SO52 *(R) Right
Back Passenger Side

Note: Box available for Driver Side (L) and Passenger Side (R) - *Add to part number L or R.

No.	Model Number	Material	Height (in.)	Depth (in.)	Width (in.)	Supply Size (in)	Return Size (in)	Baffles	Gal (US)	Weight (lb.)
1.	A-SO51-242112*-S1	.125/.250 Smooth	24-5/8	21-1/4	12	2 FPT	2 FPT	1	15	36
2.	A-SO51-242118*-S1	.125/.250 Smooth	24-5/8	21-1/4	18	2 FPT	2 FPT	1	22	43
3.	A-SO51-242124*-S1	.125/.250 Smooth	24-5/8	21-1/4	24	2 FPT	2 FPT	1	29	49
4.	A-SO51-242130*-S1	.125/.250 Smooth	24-5/8	21-1/4	30	2 FPT	2 FPT	1	36	60
5.	A-SO51S-262812*-S1	.125/.250 Smooth	26-5/8	28-1/4	12	2 FPT	2 FPT	1	15	46
6.	A-SO51S-262818*-S1	.125/.250 Smooth	26-5/8	28-1/4	18	2 FPT	2 FPT	1	22	55
7.	A-SO51S-262824*-S1	.125/.250 Smooth	26-5/8	28-1/4	24	2 FPT	2 FPT	1	29	64
8.	A-SO51S-262830*-S1	.125/.250 Smooth	26-5/8	28-1/4	30	2 FPT	2 FPT	1	36	72
9.	A-SO52-152324*-S1	.125/.250 Smooth	15	23	24	2 FPT	2 FPT	1	23	60
10.	A-SO52-152330*-S1	.125/.250 Smooth	15	23	30	2 FPT	2 FPT	1	29	64
11.	A-SO52-212324*-S1	.125/.250 Smooth	21	23	24	2 FPT	2 FPT	1	35	62
12.	A-SO52-212330*-S1	.125/.250 Smooth	21	23	30	2 FPT	2 FPT	1	44	75
13.	A-SO52S-153024*-S1	.125/.250 Smooth	15	30	24	2 FPT	2 FPT	1	23	72
14.	A-SO52S-153030*-S1	.125/.250 Smooth	15	30	30	2 FPT	2 FPT	1	29	77
15.	A-SO52S-213024*-S1	.125/.250 Smooth	21	30	24	2 FPT	2 FPT	1	35	74
16.	A-SO52S-213030*-S1	.125/.250 Smooth	21	30	30	2 FPT	2 FPT	1	44	93