

SR - Underbody Boxes - Aluminum Single Drop Open Door

Underbody boxes are super heavy duty, high capacity and offer easy access from side of truck. Boxes can be mounted with L-Shape or Top Mount Brackets. These boxes are perfect for storing your equipment, like chains, binders, straps, tarps or your personal gear or tools. Underbody boxes are available in different sizes and can be ordered custom size. All AMERICAN TRUCKBOXES boxes are designed and built to keep your equipment safe and secure.


Description

- An engineered aluminum construction
- Fully seam welded on all seams and corners
- Stainless steel continuous hinge on full length of door
- Fully concealed rain gutter with automotive weather seal
- Lockable SS Dolphin Tail HD adjustable T-handle latch
- Corners are gusseted for added strength and durability
- Stainless Steel Door Chains
- **Optional mirror finish 14g stainless steel door**
- **Mounting kit not included: (Kits Av.= M2100 • M2200 Series)**



Diamond Tread Door

Powder Coated Body

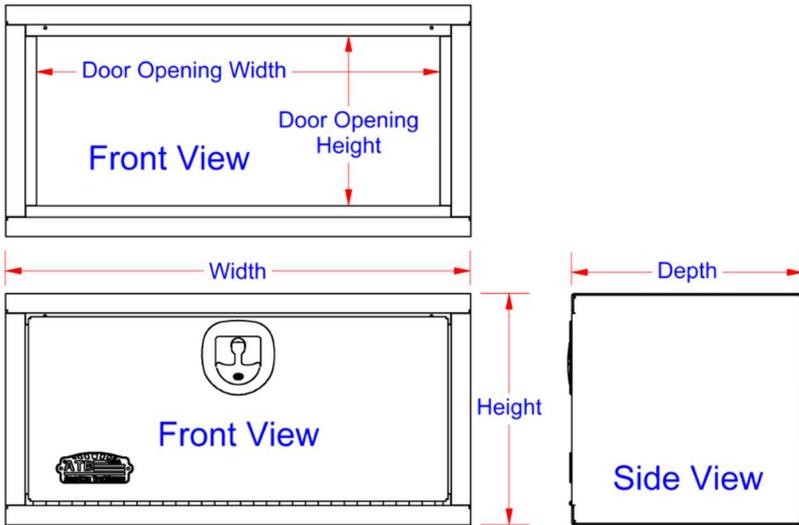

Note: Toolboxes less than 48 inches wide come standard with one lock only; however, we can make configuration changes if specified.

Notes: 1. Box door is available in: Standard = Diamond Tread (T), Smooth (S) or Mirror (M) - Add to end of part number.
 2. Powder Coated Color Finish - Add at end of part number: BX = Black and WX = White (WX)

No.	Model Number	Material	Height (in.)	Depth (in.)	Width (in.)	Door Opening Height (in.)	Door Opening Width (in.)	Weight (lb.)
1.	A-SR51-181836SD-T	.125 Smooth/.125 TP	18	18	36	13-1/8	31-1/8	46
2.	A-SR51-181848SD-T	.125 Smooth/.125 TP	18	18	48	13-1/8	43-1/8	58
3.	A-SR51-181860SD-T	.125 Smooth/.125 TP	18	18	60	13-1/8	55-1/8	69
4.	A-SR51-182436SD-T	.125 Smooth/.125 TP	18	24	36	13-1/8	31-1/8	54
5.	A-SR51-182448SD-T	.125 Smooth/.125 TP	18	24	48	13-1/8	43-1/8	67
6.	A-SR51-182460SD-T	.125 Smooth/.125 TP	18	24	60	13-1/8	55-1/8	80
7.	A-SR51-242424SD-T	.125 Smooth/.125 TP	24	24	24	19-1/8	19-1/8	47
8.	A-SR51-242436SD-T	.125 Smooth/.125 TP	24	24	36	19-1/8	31-1/8	65
9.	A-SR51-242448SD-T	.125 Smooth/.125 TP	24	24	48	19-1/8	43-1/8	79
10.	A-SR51-242460SD-T	.125 Smooth/.125 TP	24	24	60	19-1/8	55-1/8	92