

TL – Tank L-Shape - Steel or Aluminum

Tanks are heavy duty, and offer auxiliary supply for water, diesel, oil and/or biofuels. Tanks can be mounted on or in truck box, flatbed and trailer. **It is the user's responsibility to comply with local, state and federal requirements pertaining to safe transportation, loading and discharging of tank contents.** These tanks are not intended to be used for gasoline or cannot be used to transfer gasoline to another vehicle. ATB Secure & Trusted Design.

Description

- An engineered steel or aluminum construction
- Fully seam welded on all seams and corners
- Built-in baffles to reduce sloshing
- 2" female pipe tread couplings - inside reinforced
- 1-1/2" top fitting for sensor and 3/8" rollover valve/bottom drain
- Designed to work with 20" to 28" cross boxes or chest boxes
- Pressure tested for leaks
- Double Coated - Zinc epoxy primer & MR powder baked topcoat
- Mounting bracket tabs to secure tank
- Tanks to be used with diesel fuel only – Use only vented filler cap
- Mounting kit included - M3700 Series



TL41 & TL51 Tank




TFC21-AU-A



TL42 & TL52 Tank

Tanks should be mounted to ATB mounting installation guideline. Failure to properly

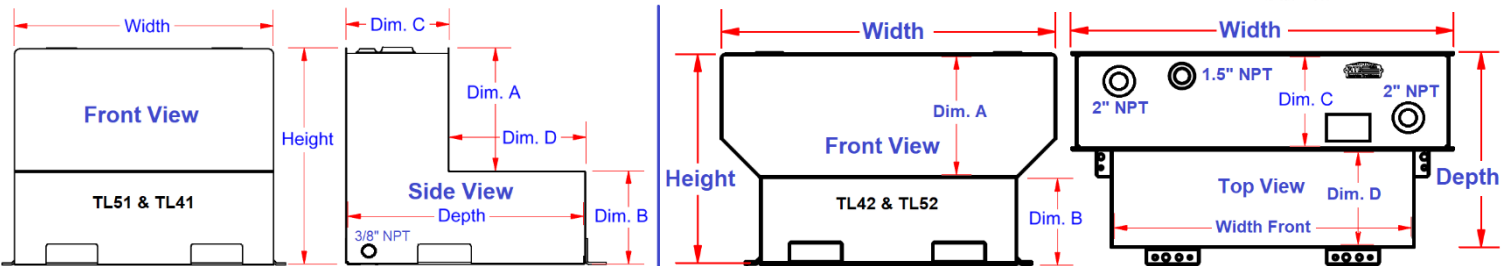

mount tank will void warranty.

Note: *Boxes are available in: Black (BX) and White (WX) Finish – add after part number.

No.	Model Number	Material	Height (in.)	Depth (in.)	Width (in.)	Height A (in.)	Height B (in.)	Depth C (in.)	Depth D (in.)	Pickup Box	Mounting Kit	Capacity (Gallons)	Weight (lb.)
1.	A-TL51-203148S-*2	.125 Alum	20	31	48	10	10	11	20	Any	M3705	78	92
2.	A-TL51-243148S-*2	.125 Alum	24	31	48	14	10	11	20	Any	M3705	86	97
3.	A-TL51-243154D-*2	.125 Alum	24	31	54	14	10	11	20	8'	M3705	98	108
4.	A-TL51-243554D-*2	.125 Alum	24	35	54	14	10	11	24	8'	M3705	110	115
5.	A-TL52-243158D-*2	.125 Alum	24	31	58-49	14	10	11	20	6'-6-1/2/8'	M3705	94	108
6.	A-TL52-243558D-*2	.125 Alum	24	35	58-49	14	10	11	24	6-1/2/8'	M3705	102	112
7.	A-TL52-243958D-*2	.125 Alum	24	39	58-49	14	10	11	28	6-1/2/8'	M3705	110	120
8.	A-TL52-263758D-*2	.125 Alum	26	37	58-49	16	8	13	24	6-1/2/8'	M3705	102	117
9.	A-TL52-264158D-*2	.125 Alum	26	41	58-49	16	8	13	28	6-1/2/8'	M3705	110	125
10.	S-TL41-203148S-*2	14g Steel	20	31	48	10	10	11	20	Any	M3705	78	164
11.	S-TL41-243148S-*2	14g Steel	24	31	48	14	10	11	20	Any	M3705	86	174
12.	S-TL41-243154D-*2	14g Steel	24	31	54	14	10	11	20	8'	M3705	98	190
13.	S-TL41-243554D-*2	14g Steel	24	35	54	14	10	11	24	8'	M3705	110	202
14.	S-TL42-243158D-*2	14g Steel	24	31	58-49	14	10	11	20	6'-6-1/2/8'	M3705	94	190
15.	S-TL42-243558D-*2	14g Steel	24	35	58-49	14	10	11	24	6-1/2/8'	M3705	102	200
16.	S-TL42-243958D-*2	14g Steel	24	39	58-49	14	10	11	28	6-1/2/8'	M3705	110	210
17.	S-TL42-263758D-*2	14g Steel	26	37	58-49	16	8	13	24	6-1/2/8'	M3705	102	206
18.	S-TL42-264158D-*2	14g Steel	26	41	58-49	16	8	13	28	6-1/2/8'	M3705	110	218

Note: Tanks are available in different configuration and custom sizes; call the factory for different sizes and options.