

TS – Auxiliary Fuel Tanks - Steel or Aluminum

Tanks are heavy duty, and offer auxiliary supply for water, diesel, oil and/or biofuels. Tanks can be mounted on, truck, flatbed and trailer. **It is the user's responsibility to comply with local, state and federal requirements pertaining to safe transportation, loading and discharging of tank contents.** These tanks are not intended to be used for gasoline or cannot be used to transfer gasoline to another vehicle. ATB Secure & Trusted Design.



Description

- An engineered high strength steel or aluminum construction
- Fully seam welded on all seams and corners
- Built-in baffle(s) to reduce sloshing in larger tanks
- 2" female pipe thread couplings - inside reinforced
- 1-1/2" top fitting for sensor and 3/8" ROV/bottom drain
- Pressure tested for leaks
- Double Coated - Zinc epoxy primer & MR powder baked topcoat
- Mounting bracket tabs to secure tank
- Tanks to be used with diesel fuel only – Use only vented filler cap
- Mounting kit included - M3700 Series



TFC21-AU-A

Aluminum Tank

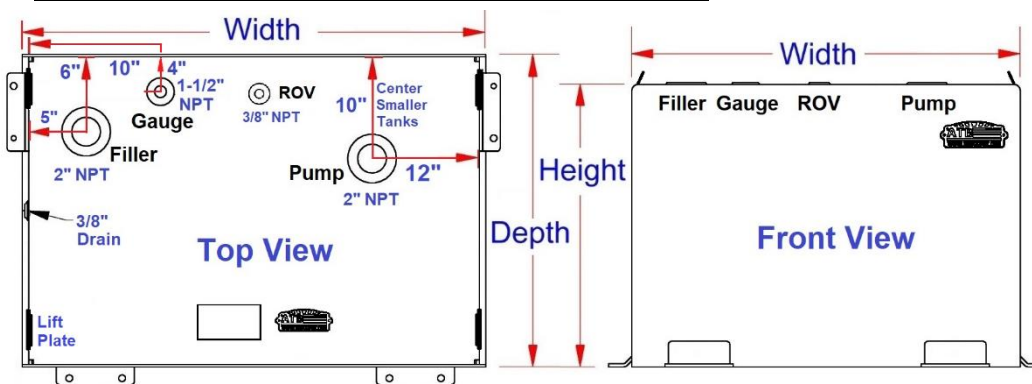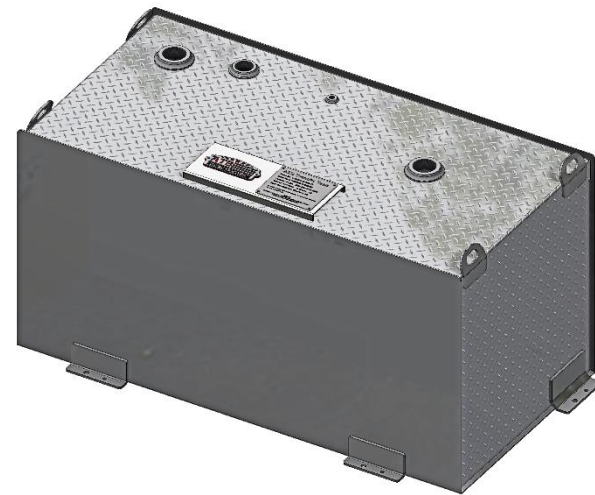

Steel Tank

Tanks should be mounted to ATB mounting installation guidelines. Failure to properly mount the tank will void warranty.

Note: *Tanks are available in multiple colors: Black (B) and White (W) Finish.

No.	Model Number	Material	Height (in.)	Depth (in.)	Width (in.)	Mounting Kit	Capacity (Gal.)	Weight (lb.)
1.	A-TS5-181426N-T2	.125 Smooth/.125 Tread	18	14	26	M3702	25	38
2.	A-TS5-182036N-T2	.125 Smooth/.125 Tread	18	20	36	M3702	50	60
3.	A-TS5-181654S-T2	.125 Smooth/.125 Tread	18	16	54	M3702	60	78
4.	A-TS5-182154D-T2	.125 Smooth/.125 Tread	18	21	54	M3705	80	98
5.	A-TS5-242445D-T2	.125 Smooth/.125 Tread	24	24	45	M3705	102	106
6.	A-TS5-261254D-T2	.125 Smooth/.125 Tread	26	12	54	M3705	65	84
7.	A-TS6-202454D-T2	.190 Smooth/.190 Tread	20	24	54	M3705	102	166
8.	A-TS6-242445D-T2	.190 Smooth/.190 Tread	24	24	45	M3705	102	154
9.	S-TS4-181426N-*2	14 Gauge Steel	18	14	26	M3702	25	68
10.	S-TS4-182036N-*2	14 Gauge Steel	18	20	36	M3702	50	106
11.	S-TS4-181654S-*2	14 Gauge Steel	18	16	54	M3702	60	140
12.	S-TS4-182154D-*2	14 Gauge Steel	18	21	54	M3705	80	174
13.	S-TS4-242445D-*2	14 Gauge Steel	24	24	45	M3705	102	184
14.	S-TS5-261254D-*2	14 Gauge Steel	26	12	54	M3705	65	140
15.	S-TS5-202454D-*2	12 Gauge Steel	20	24	54	M3705	102	274
16.	S-TS5-242445D-*2	12 Gauge Steel	24	24	45	M3705	102	254

Note: Tanks are available in different configuration and custom sizes; call the factory for different sizes and options.